




TC Sunshade




Each TC Sunshade baguette production run is tailored to the specific color, shape and texture characteristics unique to your project. We offer four standard profiles, shown to the left. They are fin, 2"x 6" rectangle, 2"x 4" rectangle, and square. TC Sunshade baguettes come in a standard length of 5 feet with shorter lengths formed or cut to length according to project needs. These units can be installed in a horizontal or vertical orientation. Units can have various attachment methods based on design, orientation, and location. Baguettes are used in various applications, including as awnings over windows, parking garage screens, or mechanical equipment screens. Custom colors, glazing and engobe glazing are available upon request.

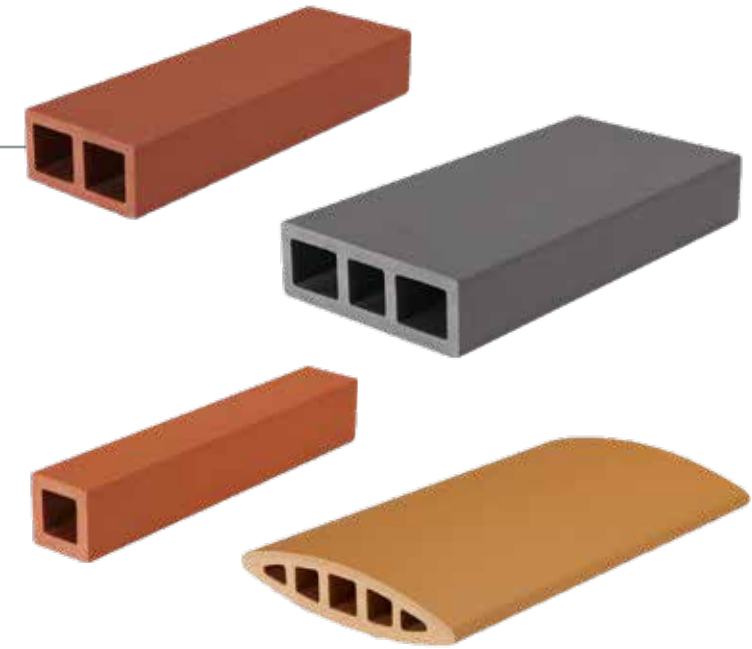



Specifications

Standard Shapes	Colors	Finishes	Weight	Coursing	Installation
2"x 7" fin	See pages 27-28 for options.	See page 26 for options.	5.8 lbs/linear ft	Can be installed horizontally, vertically, or in other orientations	Varies. Typically interior support tube attached to wall hanger or angle clips attached to a sub frame.
2"x 6" rectangle			5.33 lbs/linear ft		
2"x 4" rectangle			4.5 lbs/linear ft		
2"x 2" square			2.25 lbs/linear ft		

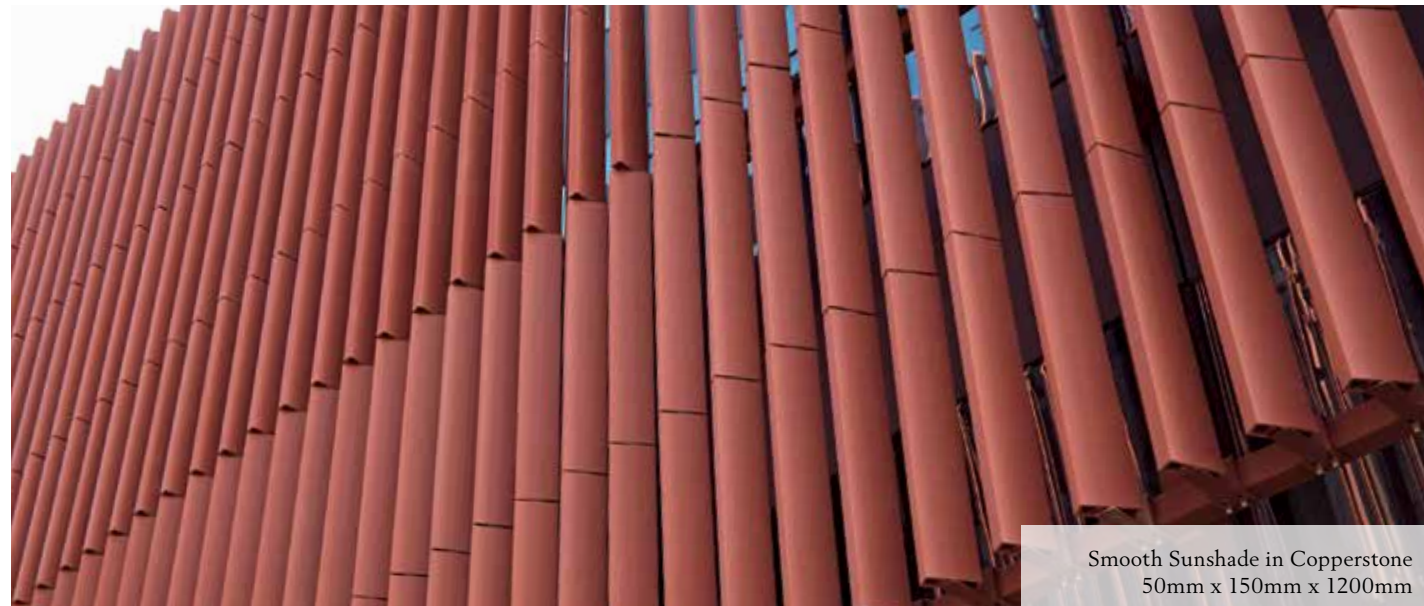

Smooth Sunshade in Copperstone
50mm x 150mm x 1200mm

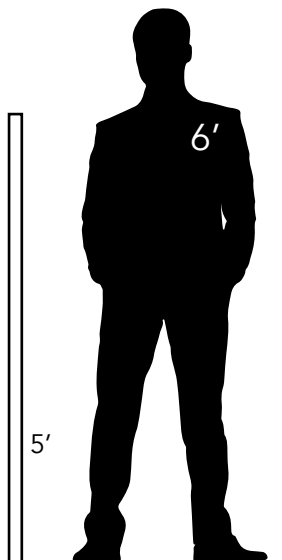

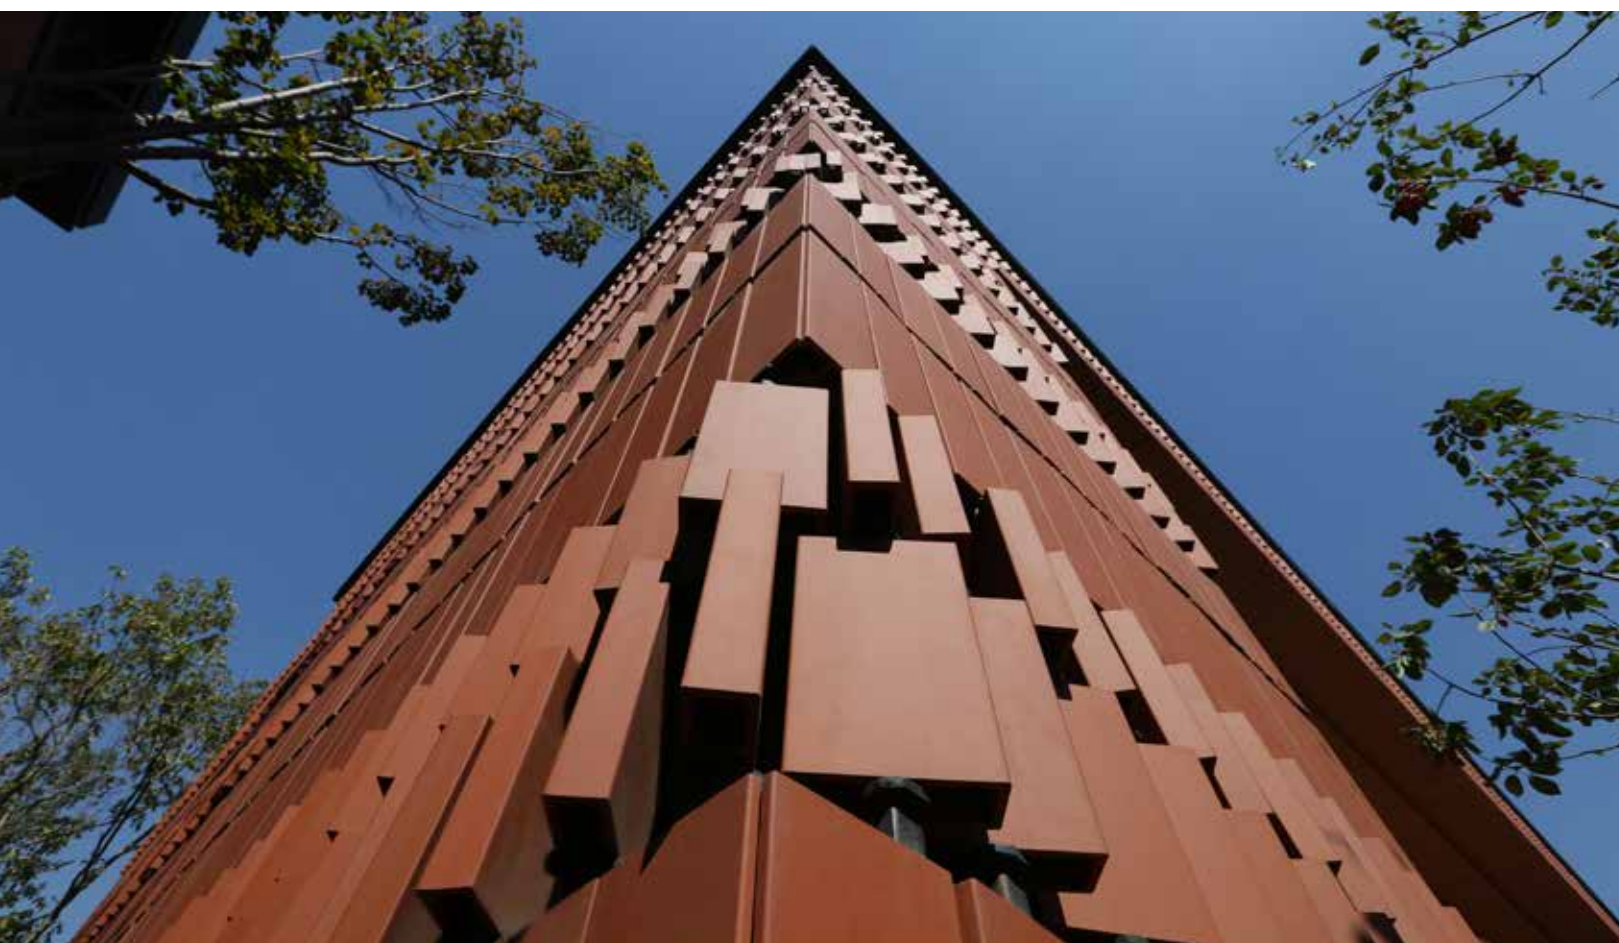

Characteristics

- 

Absorption
ASTM C67-02C
3.3 - 5.6%
- 

Moisture Expansion
ISO 10545-10
< 0.06%
- 

Modulus of Rupture
ASTM E880/C880M-15
1305 psi
- 

Freeze & Thaw
ASTM C67
Tested to 50 Cycles & Passed
- 

Reaction to Fire
ASTM C67
Non flammable
- 

Breaking Strength
ASTM E880/C880-15
5230 lbf
- 

Efflorescence
ASTM C67-02C
No efflorescence
- 


Chemical Resistance
ASTM C67-02C
Resistant to low concentrations
of acid and alkalis



Smooth panels and sunshade in Copperstone
50mm x 150mm x 1200mm

Panel Manufacturing Tolerances

50x50x1200mm

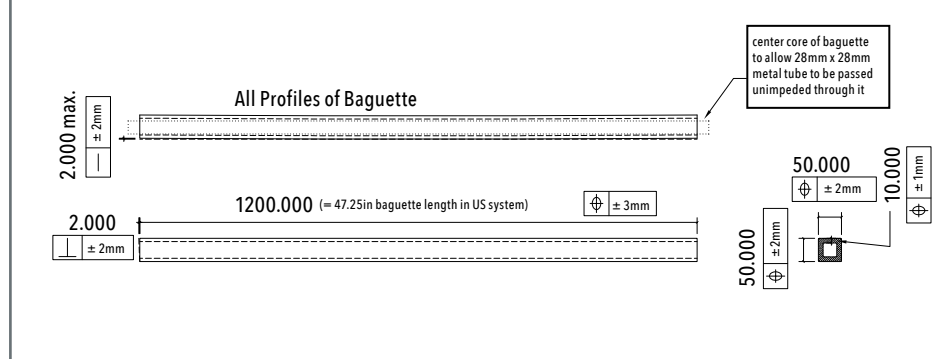

Attachment Assembly

